




ALUMINUM GUTTER GUARD INSTALLATION GUIDE

In Your Kit

Gutter Guard
(Also referred to as Guard)

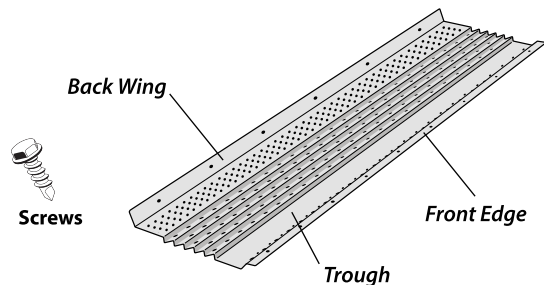

Recommended Additional Tools

GLOVES DRILL TAPE MEASURE
SAFETY GLASSES TIN SNIPS OR DREMEL EXTENSION LADDER

DO NOT RETURN THIS PRODUCT TO THE STORE!



Please contact our Customer Experience Team before returning any product. If you experience problems with your installation, our team will be happy to assist you.

During installation we recommend that you...

- Wear gloves and safety glasses.
- Use an extension ladder and standoff for stability.
- Make all cuts to the gutter guards on the ground.

ALSO MAKE SURE TO:


- Obey local building codes.
- Remove any labels/stickers from the gutter guard piece as needed.

FREEZING CONDITIONS

If you live in an area that is prone to freezing, the following issues can occur with any gutter guard: Icicles/Dams forming and Snow Melting.

! Important Reminder


Missing this step can result in **rainwater runoff**.

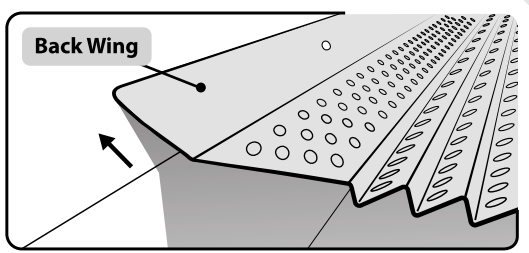


Back wing should face **up** for proper installation.

Start Here

1 Clean Out & Repair Gutters

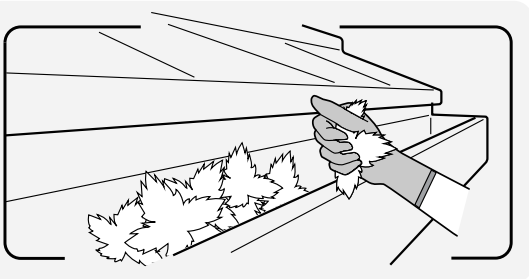


2 Measure & Cut the Guard as Needed

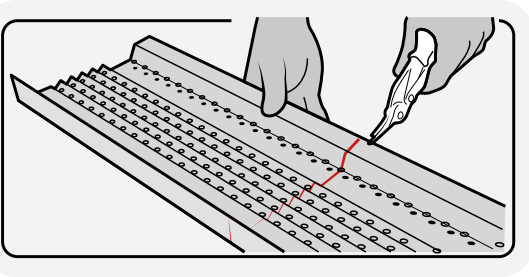

Use a new, or freshly sharpened pair of tin snips or a Dremel to make any cuts to the guard. For safety, use protective gloves and make cuts while on the ground.


3 Start Laying the First Piece

We recommend starting at the end of the gutter.

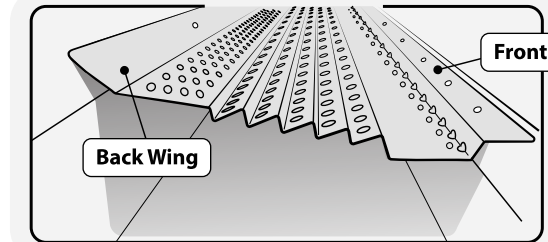

Place the guard on the gutter with the front edge resting on the front lip of the gutter. The rear of the guard should sit just above the back of the gutter (resting on the gutter hangers) with a gradual slope downward.

4 Securing the Guard

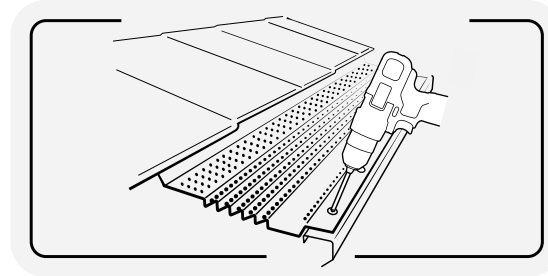


Using three of the provided screws per section, secure the front of the guard to the front lip of the gutter – place one screw at each end and one in the center.

For additional strength, secure the back wing of the guard to the fascia of the home using 2-3 screws. *Note: 1 inch screws may be necessary here if you have difficulty securing with the provided 1/2 inch screws.*


5

Continue Installing Next Piece

The guards were designed for the sections to overlap.

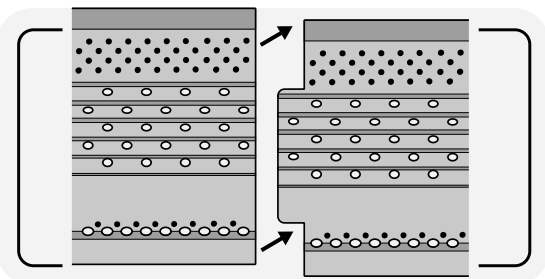

When joining sections, simply overlap the end of one section over the notched end of the adjoining section until they abut. The drain holes will align when the two sections are joined properly.

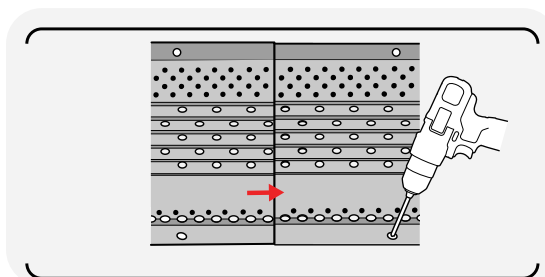


Note: All-Aluminum gutter guards are made available in factory finished paint colors and in a mill finish. Modifications made to any materials or components, including painting, **WILL VOID** the manufacturer's warranty and may negatively impact the drainage performance of the gutter guard.

Gutter Guards May Require Maintenance


CHECK OUT OUR

Gutter Guard Brush (Sold Separately)


Maintain your gutter guards with our one-of-a-kind Gutter Guard brush. Simply attach to any extension pole and sweep away stubborn debris from the safety of the ground.




HOW-TO Inside Corners



Trim the front edge of Piece A as shown in Image 1. Use the larger, front row of drain holes in the trough as a cut line. This will allow Piece B to fit properly atop Piece A.




Cut the end of Piece B at 45 degrees. Next, make a 1/2 inch straight cut to the back wing. Place piece B atop piece A and check that the alignment has no gapping.




A completed inside corner should look like Image 3. Piece B should rest atop Piece A creating a seamless miter. For a tighter seal, place a screw through Piece B into Piece A to pull the pieces together.

Installing a splash shield on inside corners can help disperse the water.


HOW-TO Outside Corners



Cut the end of Piece A at 45-degrees. Next, cut a 1/2 inch wide notch from the back wing. Then, trim off 3/4 to 1 inch from the front edge in a straight line.



Cut the end of adjoining Piece B at 45-degrees. Repeat the 1/2 inch wide notch cut on the back wing and the 3/4 to 1 inch trim from the front edge. Pieces A & B should slightly overlap.



A completed outside corner should look like Image 3. For a tighter seal, place a screw through Piece B into Piece A to pull the pieces together.

Note: The drainage holes will not align where the miter sections overlap. This is normal, and water will still drain into the gutter.



PRO TIP Cutting Miters

The small drain holes at the rear of the guard are on a 45 degree angle. Use them as a guide to cut a perfect miter.

